


4. Crear grupos de salto.

Un grupo de salto o Hunt Group en inglés, es un grupo donde se incluyen diferentes extensiones para después poder desviar desde otra extensión.

Vamos a Configure → Telephony → Phone Groups → Hunt Groups

En la imagen de abajo podéis ver el grupo 501, que contiene las extensiones 103 y 102.

En el campo Hunt Type, podemos elegir el tipo de salto, si queremos que sea secuencial, longest- idle, o peer.

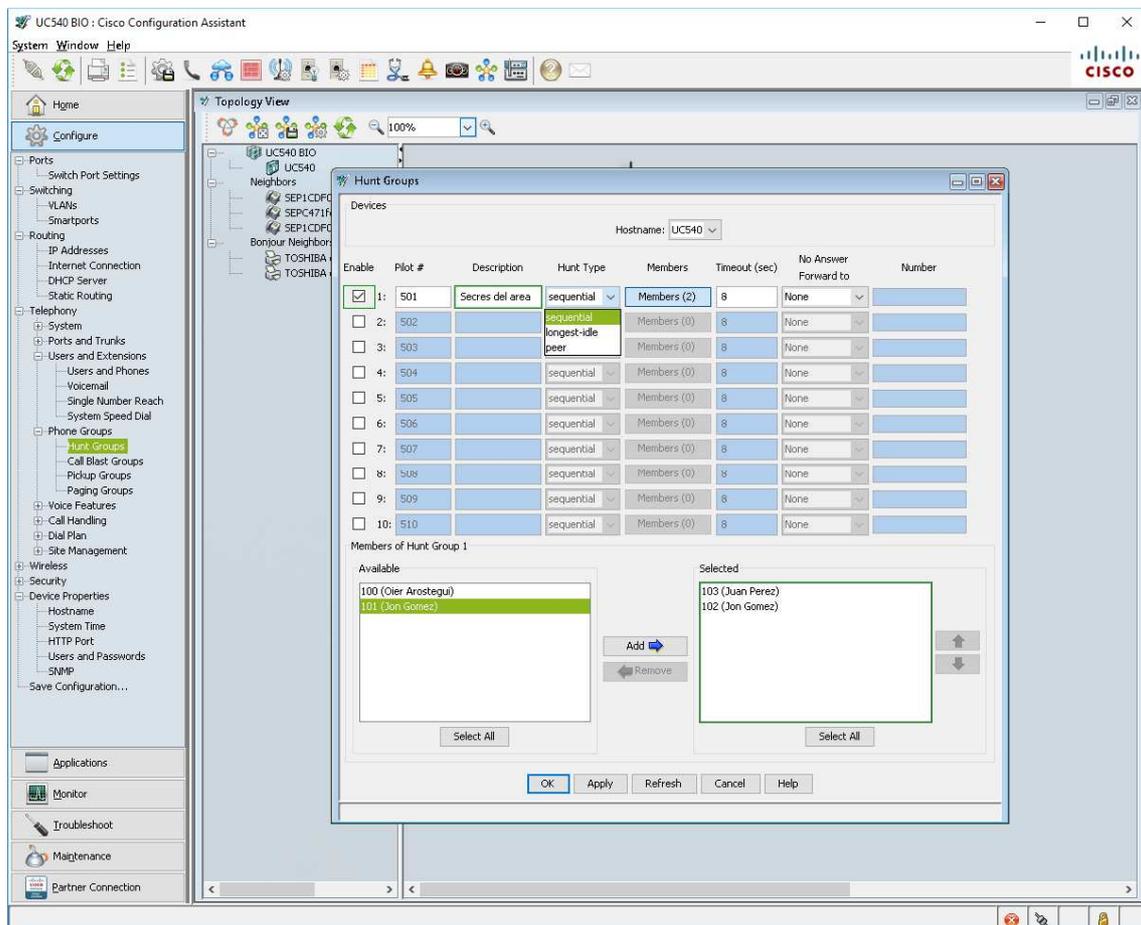


The screenshot shows the Cisco Configuration Assistant interface for a UC540 device. The 'Hunt Groups' window is open, displaying a table of configured hunt groups. The first group, 'Secres del area', is selected and its details are shown below.

Enable	Pilot #	Description	Hunt Type	Members	Timeout (sec)	No Answer Forward to	Number
<input checked="" type="checkbox"/>	501	Secres del area	secuencial	Members (2)	8	None	
<input type="checkbox"/>	502		secuencial	Members (0)	8	None	
<input type="checkbox"/>	503		longest-idle	Members (0)	8	None	
<input type="checkbox"/>	504		peer	Members (0)	8	None	
<input type="checkbox"/>	504		secuencial	Members (0)	8	None	
<input type="checkbox"/>	505		secuencial	Members (0)	8	None	
<input type="checkbox"/>	506		secuencial	Members (0)	8	None	
<input type="checkbox"/>	507		secuencial	Members (0)	8	None	
<input type="checkbox"/>	508		secuencial	Members (0)	15	None	
<input type="checkbox"/>	509		secuencial	Members (0)	8	None	
<input type="checkbox"/>	510		secuencial	Members (0)	8	None	

Members of Hunt Group 1:

Available	Selected
100 (Oier Arostegui)	103 (Juan Perez)
101 (Jon Gomez)	102 (Jon Gomez)

Si queremos que el desvío suene en todas las extensiones a la vez (modo Broadcast), tenemos que ir a Configure → Telephony → Phone Groups → Call Blast Groups y crear el grupo de la misma manera:

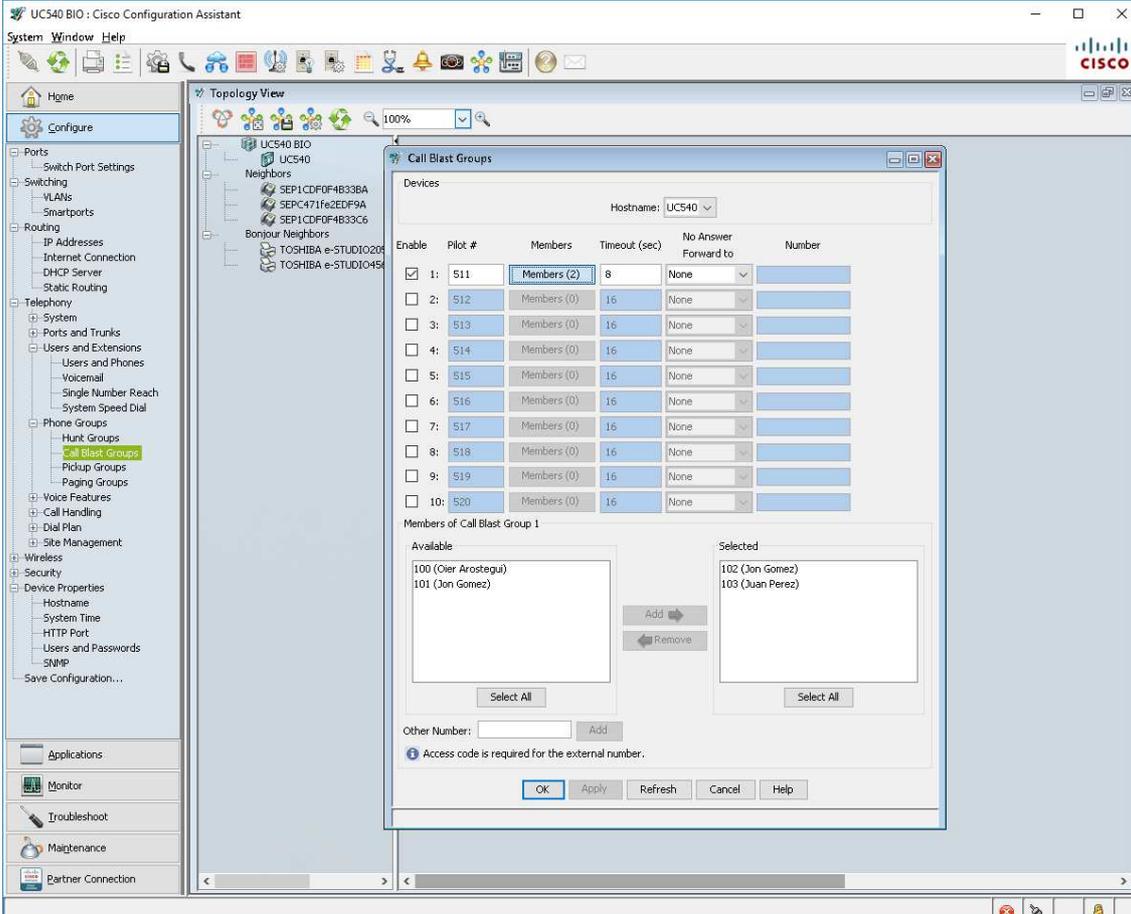

The screenshot shows the Cisco Configuration Assistant interface for a UC540 BIO. The 'Call Blast Groups' configuration window is open, displaying a table of devices and their settings. The 'Members of Call Blast Group 1' section shows two available members: 100 (Oier Arostegui) and 101 (Jon Gomez), and two selected members: 102 (Jon Gomez) and 103 (Juan Perez).

Enable	Pilot #	Members	Timeout (sec)	No Answer Forward to	Number
<input checked="" type="checkbox"/>	1: 511	Members (2)	8	None	
<input type="checkbox"/>	2: 512	Members (0)	16	None	
<input type="checkbox"/>	3: 513	Members (0)	16	None	
<input type="checkbox"/>	4: 514	Members (0)	16	None	
<input type="checkbox"/>	5: 515	Members (0)	16	None	
<input type="checkbox"/>	6: 516	Members (0)	16	None	
<input type="checkbox"/>	7: 517	Members (0)	16	None	
<input type="checkbox"/>	8: 518	Members (0)	16	None	
<input type="checkbox"/>	9: 519	Members (0)	16	None	
<input type="checkbox"/>	10: 520	Members (0)	16	None	

Members of Call Blast Group 1

Available: 100 (Oier Arostegui), 101 (Jon Gomez)
Selected: 102 (Jon Gomez), 103 (Juan Perez)

Other Number: Add

Access code is required for the external number.

OK Apply Refresh Cancel Help