



10. Hacer back up y restaurar el sistema

Desde el menú: Maintenance → Configuration Archive.

Seleccionamos la ruta donde queremos que nos deje el archivo de back up (en nuestro equipo local):

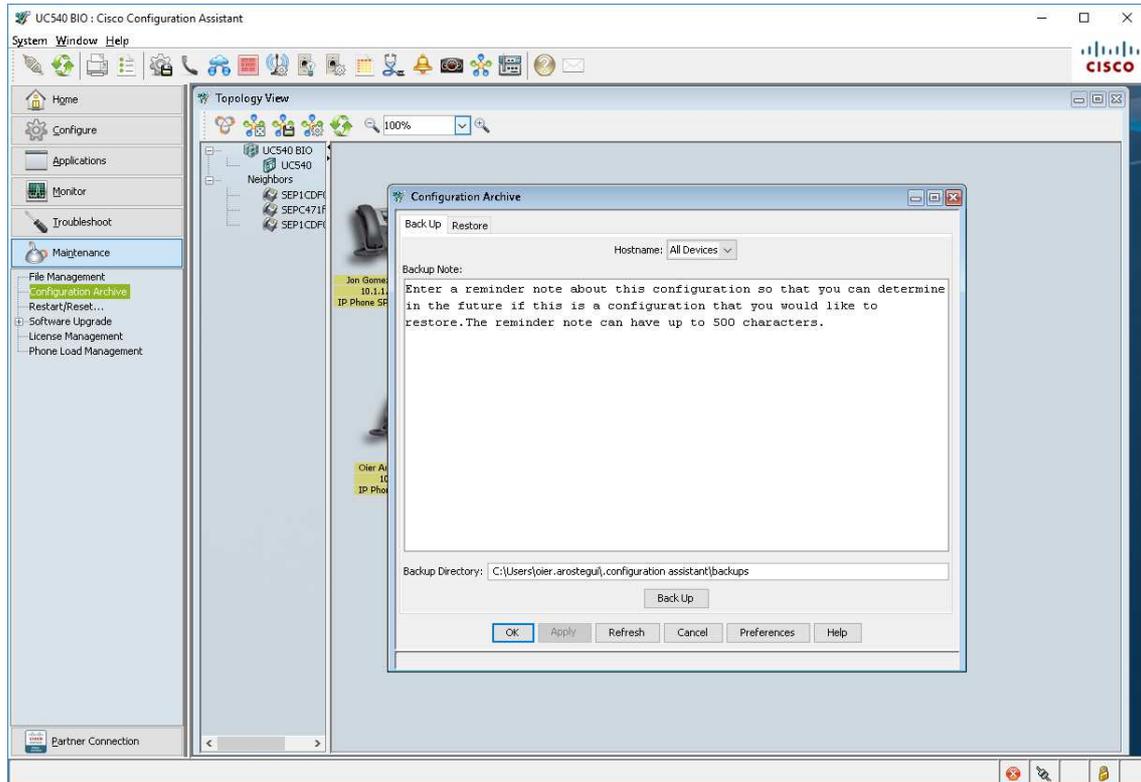


Y pulsamos el botón “Back Up”:

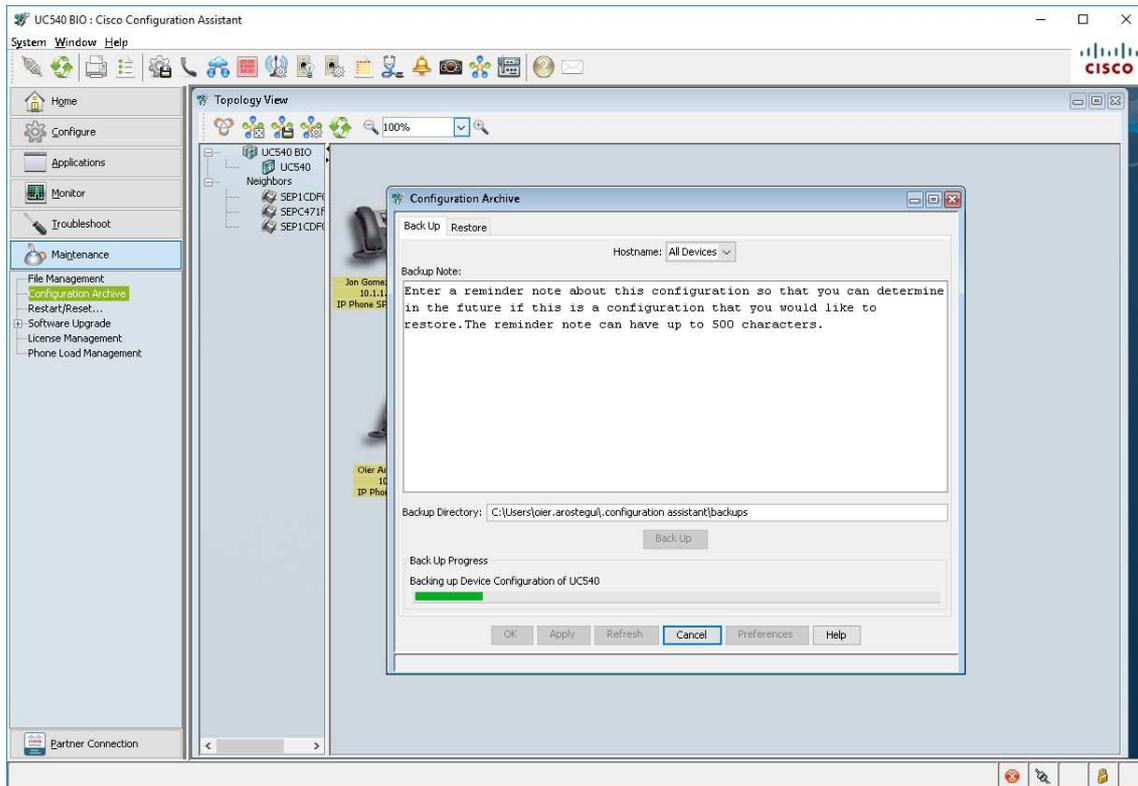

Antes de realizar cualquier cambio, más si la máquina está en producción, se recomienda siempre hacer un back up por si acaso no funciona el último cambio y tenemos que volver atrás rápidamente.

Para restaurar la configuración de un back up existente, vamos a la pestaña Restore, seleccionamos que nos muestre todos los archivos de back up existente, seleccionamos el que queramos restaurar y pulsamos sobre el botón "Restore".

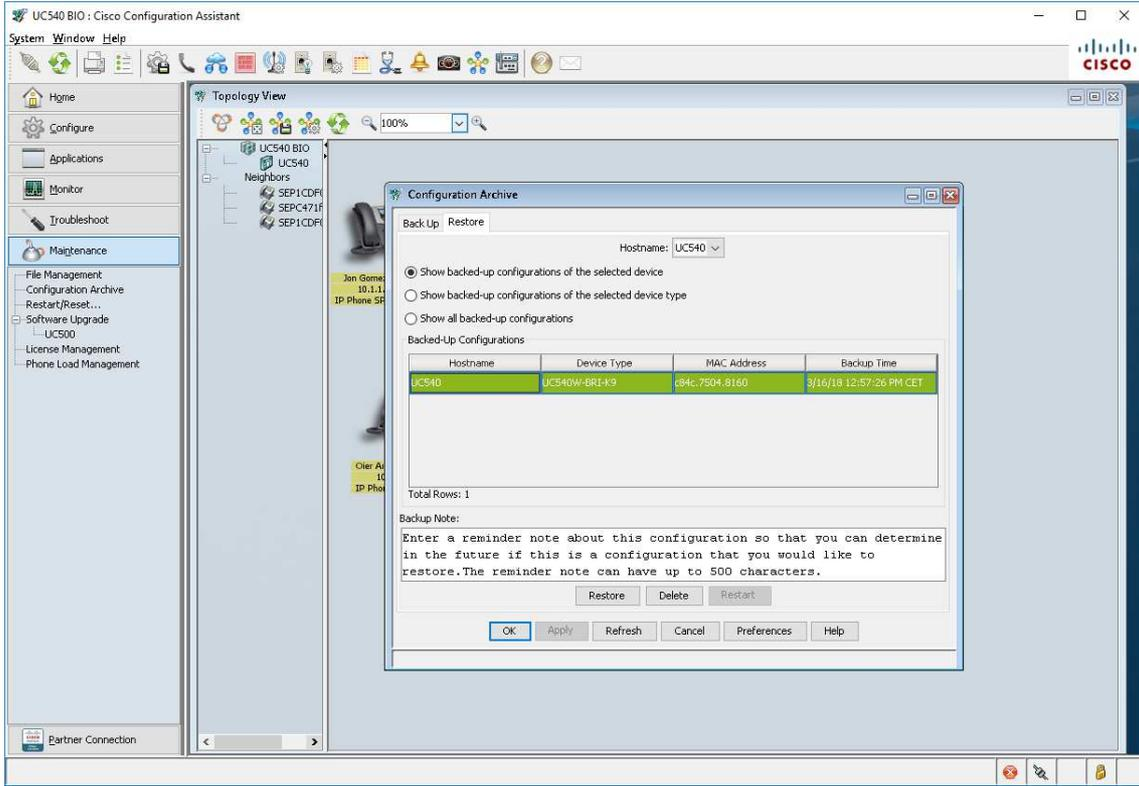

The screenshot shows the Cisco Configuration Assistant interface for a UC540 BIO. A 'Configuration Archive' dialog box is open, displaying a table of backed-up configurations for the selected device (UC540). The table has the following data:

| Hostname | Device Type | MAC Address | Backup Time |
|----------|---------------|----------------|-------------------------|
| UC540 | UC540W-BRI-k9 | c34c.7504.8160 | 3/16/18 12:57:26 PM CET |

Below the table, it indicates 'Total Rows: 1'. The dialog also includes a 'Backup Note' field with the following text: 'Enter a reminder note about this configuration so that you can determine in the future if this is a configuration that you would like to restore. The reminder note can have up to 500 characters.' At the bottom of the dialog, there are buttons for 'OK', 'Apply', 'Refresh', 'Cancel', 'Preferences', and 'Help'.