



## 6. Añadir un Speed Dial al teléfono.

Desde el menú: Configure → Telephony → Users and Extensions → Users and Phones.

Seleccionamos el teléfono donde lo queremos añadir.

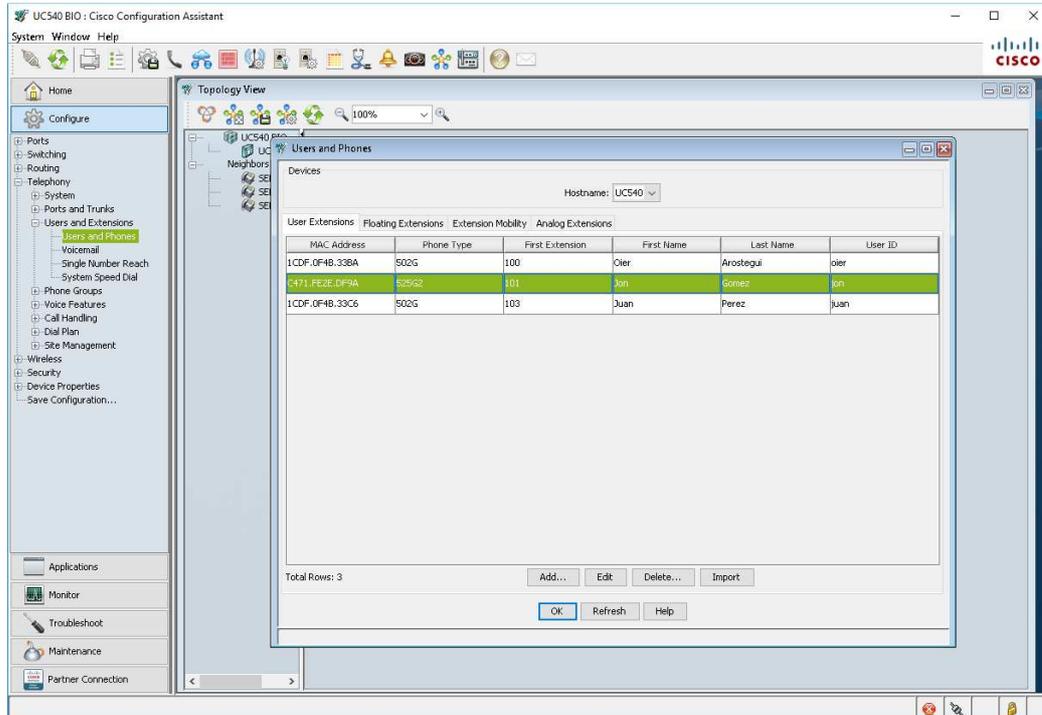

Pulsamos sobre Edit, y vamos a la pestaña de Speed Dial. Seleccionamos la línea 1 y ponemos la extensión que queremos, en el campo Label ponemos el nombre que queramos para identificar esa extensión.

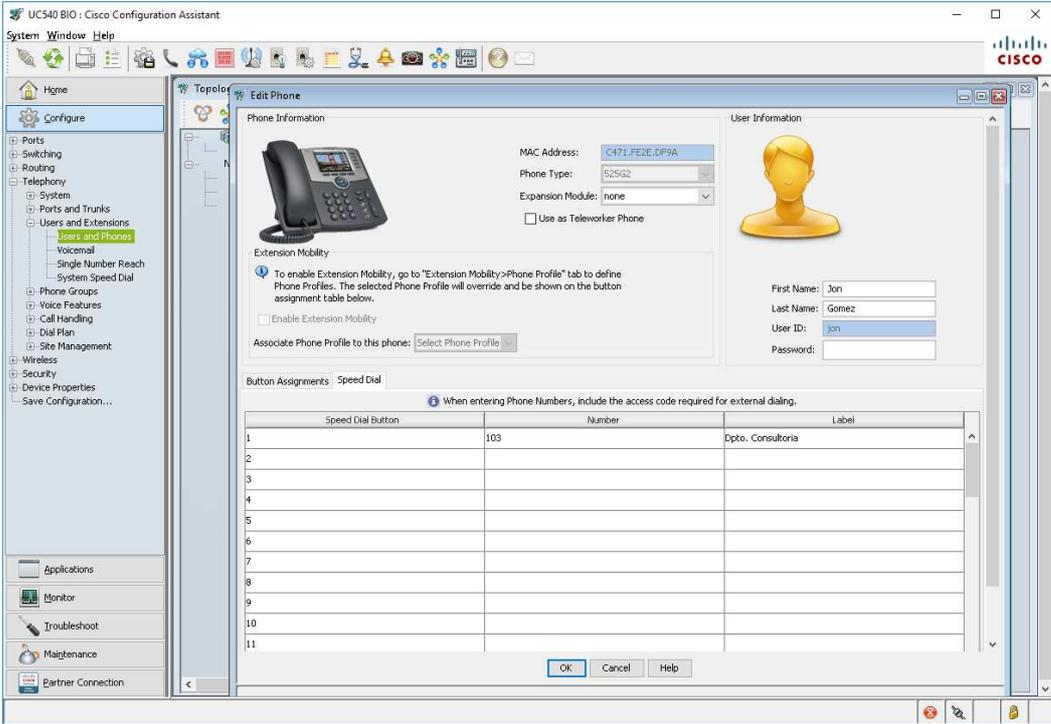

UCS40 BIO : Cisco Configuration Assistant

System Window Help

Home

Configure

- Ports
- Switching
- Routing
- Telephony
  - System
  - Ports and Trunks
  - Users and Extensions
    - Users and Phones
    - Voicemail
    - Single Number Reach
    - System Speed Dial
    - Phone Groups
    - Voice Features
    - Call Handling
    - Dial Plan
    - Site Management
  - Wireless
  - Security
  - Device Properties
  - Save Configuration...

Applications

Monitor

Troubleshoot

Maintenance

Partner Connection

Topologies

Edit Phone

Phone Information

MAC Address: C471.FE3E.DF9A

Phone Type: S25G2

Expansion Module: none

Use as Teleworker Phone

User Information

First Name: Jon

Last Name: Gomez

User ID: jon

Password:

Extension Mobility

Enable Extension Mobility

Associate Phone Profile to this phone: Select Phone Profile

Button Assignments: Speed Dial

When entering Phone Numbers, include the access code required for external dialing.

Speed Dial Button	Number	Label
1	103	Dpto. Consultoria
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		

OK Cancel Help